



ECL-103

LONMARK® Certified 10-Point Programmable Controller



Overview

The ECL-103 is a microprocessor-based programmable controller designed to control terminal units such as fan coil units, heat pump units, unit ventilators, and chilled ceilings. This controller uses the LonTalk® communication protocol and is LONMARK certified as an SCC Generic device, guaranteeing compatibility and interoperability with other manufacturers' LonMark certified controllers.



Applications

These controllers meet the requirements of the following applications:

- Fan Coil Units
- Heat Pumps
- Unit Ventilators
- Chilled Ceilings

Features & Benefits

Flexible Inputs and Outputs

This controller has various input types including resistance, voltage, and digital-based ones. Moreover, it provides digital, floating, pulse width modulation, and proportional control outputs for valves, heating elements, fans, and lighting applications. This controller covers all industry-standard HVAC unitary applications.

Highly Accurate Universal Inputs


Highly accurate universal inputs support thermistors and resistance temperature detectors (RTDs) that range from 0 Ohms to 350,000 Ohms, as well as support for inputs requiring 0 to 10VDC or 0 to 20mA with an external resistor. This provides the freedom of using your preferred or engineer-specified sensors, in addition to any existing ones.

Rugged Inputs/Outputs

Rugged hardware inputs and outputs eliminate need for external protection components, such as diodes for 12V DC relays.

Programmability

Supports Distech Controls' EC-*gfx*Program, which makes Building Automation System (BAS) programming effortless by allowing you to visually assemble building blocks together to create a custom control sequence for any HVAC / building automation application.

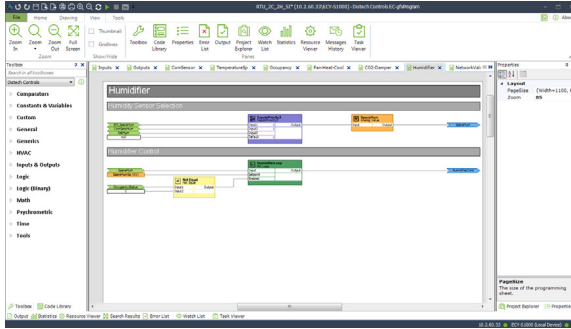

Increased Energy Efficiency

Improves energy efficiency when combined with:

- Motion detectors to automatically adjust a zone's occupancy mode from standby to occupied when presence is detected
- CO₂ sensors as part of a demand-controlled ventilation strategy that adjusts the amount of fresh air intake according to the number of building occupants
- Light switches to control both lighting and a room's HVAC occupancy / standby mode setting

Open-to-Wireless™ Solution



The controllers are Open-to-Wireless™ ready, and when paired with the Wireless Receiver, work with a variety of wireless battery-less sensors and switches, to reduce the cost of installation and minimize the impact on existing partition walls. For supported frequencies in your area, refer to the [Open-to-Wireless Solution Guide](#).

Available with an optional Wireless Receiver that supports up to 18 wireless inputs to create wire-free installations.

Allure™ Series Communicating Sensor Support

These controllers work with a wide range of sensors, such as the Allure Series Communicating Sensors that are designed to provide intelligent sensing and control devices for increased user experience and energy efficiency.

- Allure EC-Smart-View sensors feature a backlit-display and graphical menus that provide precise environmental zone control, with any combination of the following: temperature, humidity, CO₂, and motion sensor.
- Allure EC-Smart-Comfort sensors feature colored LED indicators to provide user feedback, rotary knobs to adjust the setpoint offset and fan speed, and an occupancy override push button. This sensor can also be expanded with a combination of up to 4 add-on push button modules for lighting and shade/ sunblind control.
- Allure EC-Smart-Air sensors combine precise environmental sensing in a discreet and alluring enclosure for temperature, humidity, and CO₂.



Model Selection

| Model | ECL-103 |
|------------------------------|---------------------|
| Points | 10-Point Controller |
| Universal hardware inputs | 4 |
| Wireless inputs ¹ | 18 |
| 15 Vdc Power Supply | ■ |
| Digital (triac) outputs | 4 |
| Universal outputs | 2 |

1. All controllers are Open-to-Wireless ready. Available when an optional Wireless Receiver is connected to the controller. Some wireless sensors may use more than one wireless input from the controller.

Recommended Applications









| Model | ECL-103 |
|--|---------|
| 2 Pipe Fan Coil | ■ |
| 2 Pipe Fan Coil with Changeover Sensor | ■ |
| 4 Pipe Fan Coil | ■ |
| Heat Pump Unit | ■ |
| Unit Ventilator | ■ |
| Chilled Ceiling | ■ |

Objects List

| Objects List | |
|---|-----|
| Calendar Objects | 1 |
| <input type="checkbox"/> Events per calendar | 50 |
| Schedule Objects | 2 |
| <input type="checkbox"/> Special events per schedule | 5 |
| PID Loop Objects | 8 |
| Constants: | |
| <input type="checkbox"/> Boolean | 124 |
| <input type="checkbox"/> Enumeration | 62 |
| <input type="checkbox"/> Numeric | 56 |
| Variables: | |
| <input type="checkbox"/> Boolean | 124 |
| <input type="checkbox"/> Enumeration | 54 |
| <input type="checkbox"/> Numeric | 56 |
| nciSetpoint | ■ |
| Total Network Variables | 170 |
| Network Variable Input (General Usage): | |
| <input type="checkbox"/> NVI Changeable Type, Up to 3` Bytes ¹ | 50 |
| Network Variable Output (General Usage): | |
| <input type="checkbox"/> NVO Changeable Type, Up to 3` Bytes | 50 |
| Hardware Input Network Variable: | |
| <input type="checkbox"/> nvoHwInput per Hardware Input | ■ |
| Hardware Output Network Variable: | |
| <input type="checkbox"/> nviHwInput per Hardware Output | ■ |
| <input type="checkbox"/> nvoHwInput per Hardware Output | ■ |

1. Any type of Fan-In function is supported in combination with the "FOR" loop function.

Functional Profile

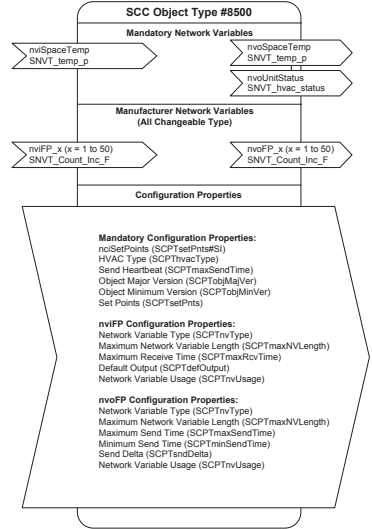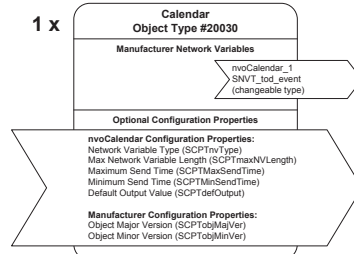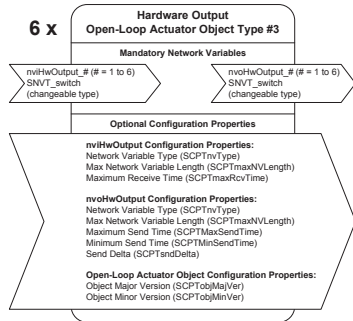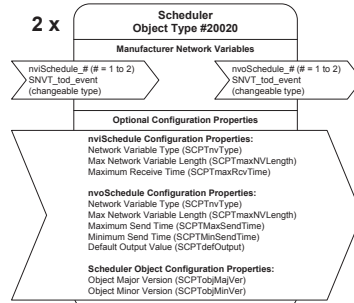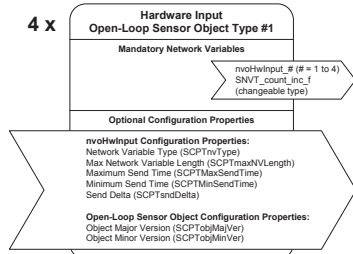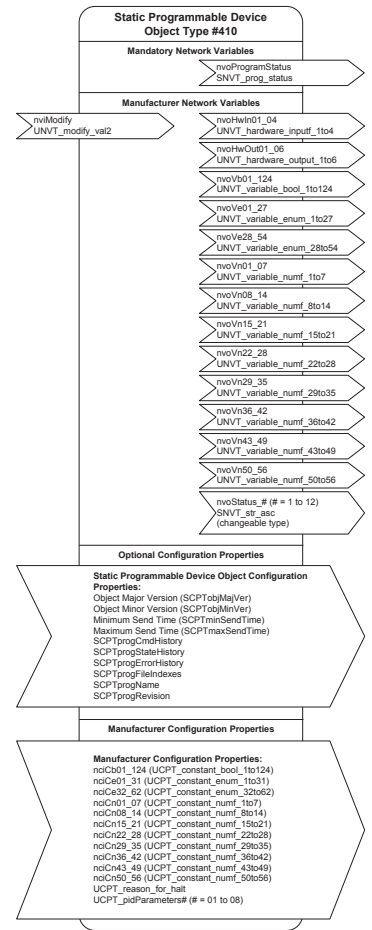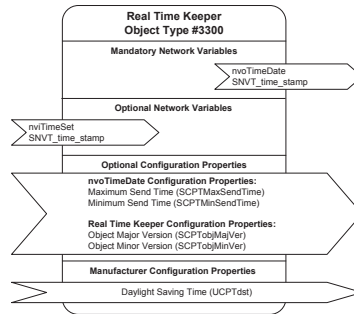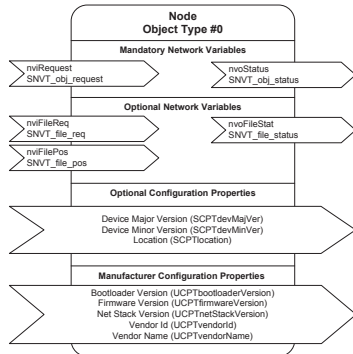

Product Specifications

Power Supply Input

| | |
|------------------------|--|
| Voltage Range | 24VAC/DC; ±15%; Class 2 |
| Frequency Range | 50/60Hz |
| Overcurrent Protection | Field replaceable fuse |
| Fuse Type | 2.0A 3.0A (for triacs when using the internal power supply) |
| Power Consumption | 10 VA typical plus all external loads ¹ , 85 VA max. (including powered triac outputs) |

1. External loads must include the power consumption of any connected modules such as an Allure Series Communicating Sensor. Refer to the respective module's datasheet for related power consumption information.

Communications

| | |
|-------------------------------------|---|
| Communication | LonTalk Protocol |
| Transceiver | FT 5000 Free Topology Smart Transceiver |
| Channel | TP/FT-10; 78Kbps |
| LonMark Interoperability Guidelines | Version 3.4 |
| Device Class | SCC Generic #8500 |

LonMark Functional Profile :

| | |
|--|---------------------------------|
| <input type="checkbox"/> Input Objects | Open-Loop Sensor #1 |
| <input type="checkbox"/> Output Objects | Open-Loop Actuator #3 |
| <input type="checkbox"/> Node Object | Node Object #0 |
| <input type="checkbox"/> Real Time Clock | Real Time Keeper #3300 |
| <input type="checkbox"/> Scheduler | Scheduler #20020 |
| <input type="checkbox"/> Calendar | Calendar #20030 |
| <input type="checkbox"/> Programmable Device | Static Programmable Device #410 |
| <input type="checkbox"/> SCC Object | SCC Generic #8500 |

Hardware

| | |
|-----------------------|---|
| Processor | STM32 (ARM Cortex™ M3) MCU, 32 bit |
| CPU Speed | 68 MHz |
| Memory | 384 kB Non-volatile Flash (applications) 1 MB Non-volatile Flash (storage) 64 kB RAM |
| Real Time Clock (RTC) | Built-in Real Time Clock without battery Network time synchronization is required at each power-up cycle before the RTC become available |
| Status Indicator | Green LEDs: power status & LAN Tx Orange LEDs: controller status & LAN Rx |

Subnetwork

Communication _____ RS-485
 Cable _____ Cat 5e, 8 conductor twisted pair
 Connector _____ RJ-45
 Connection Topology _____ Daisy-chain Configuration
 Maximum Number of Allure Series Communicating Sensors combined _____ 4¹

1. A controller can support a maximum of two Allure Series Communicating Sensor models equipped with a CO₂ sensor. The remaining connected Allure Series Communicating Sensor models must be without a CO₂ sensor.

Wireless Receiver¹

Communication Protocol _____ EnOcean wireless standard
 Number of Wireless Inputs² _____ 18
 Supported Wireless Receivers _____ Refer to the Open-to-Wireless Solution Guide
 Cable _____ Telephone cord
 Connector _____ 4P4C modular jack
 Length (maximum) _____ 6.5ft; 2m




1. Available when an optional external Wireless Receiver module is connected to the controller. Refer to the Open-to-Wireless Solution Guide for a list of supported EnOcean wireless modules.
2. Some wireless modules may use more than one wireless input from the controller.

Mechanical

Dimensions (H × W × D):

ECL-103 _____ 5.2 × 7.1 × 2.13" (133 × 180 × 54.0mm)

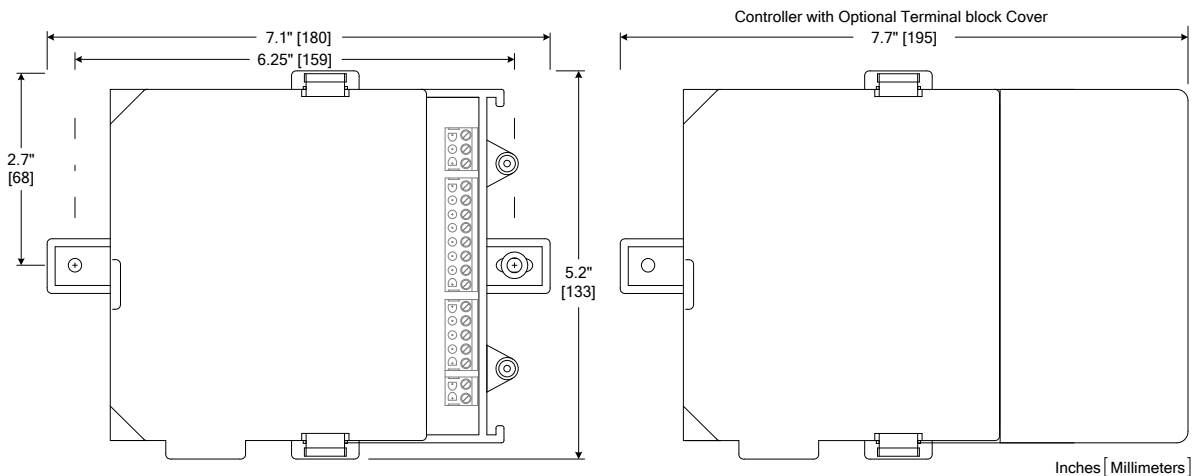

Shipping Weight:

ECL-103 _____ 0.92lbs (0.42kg)

Enclosure Material¹ _____ FR/ABS

Enclosure Rating _____ Plastic housing, UL94-5VB flammability rating
 Plenum rating per UL1995

Color _____ Black & blue casing & grey connectors

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

Environmental

Operating Temperature ————— 32°F to 122°F; 0°C to 50°C

Storage Temperature ————— -4°F to 122°F; -20°C to 50°C

Relative Humidity ————— 0 to 90% Non-condensing

Standards and Regulations

CE:

Emission ————— EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments

Immunity ————— EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC ————— This device complies with FCC rules part 15, subpart B, class B

UL Listed (CDN & US) ————— UL916 Energy management equipment

CEC Appliance Database ————— Appliance Efficiency Program¹

1. California Energy Commission's Appliance Efficiency Program: The manufacturer has certified this product to the California Energy Commission in accordance with California law.



Specifications - Universal Inputs (UI)

General

Input Type ————— Universal; software configurable

Input Resolution ————— 16-bit analog / digital converter

Power Supply Output ————— 15VDC; maximum 80mA

Contact

Type ————— Dry contact

Counter

Type ————— Dry contact

Maximum Frequency ————— 1Hz maximum,

Minimum Duty Cycle ————— 500milliseconds On / 500milliseconds Off

0 to 10VDC

Range ————— 0 to 10VDC (40kΩ input impedance)

0 to 5VDC

Range ————— 0 to 5VDC (high input impedance)

0 to 20mA

Range ————— 0 to 20mA

————— 249Ω external resistor wired in parallel



Resistance/Thermistor

Range 0 to 350 K Ω

Supported Thermistor Types Any that operate in this range

Pre-configured Temperature Sensor Types:

- Thermistor 10K Ω Type 2, 3 (10K Ω @ 77°F; 25°C)
- Platinum Pt1000 (1K Ω @ 32°F; 0°C)
- Nickel RTD Ni1000 (1K Ω @ 32°F; 0°C)
RTD Ni1000 (1K Ω @ 69.8°F; 21°C)

Specifications - Universal Outputs (UO)

General

Output Type Universal; software configurable

Output Resolution 10-bit digital to analog Converter

Output Protection Built-in snubbing diode to protect against back-EMF,
for example when used with a 12VDC relay

Output is internally protected against short circuits

Load Resistance Minimum 600 Ω for 0-10VDC and 0-12VDC outputs

Maximum 500 Ω for 0-20mA output

Auto-reset fuse Provides 24VAC over voltage protection

0 or 12VDC (On/Off)

Range 0 or 12VDC

Source Current Maximum 20 mA at 12VDC (minimum load resistance 600 Ω)¹

1. Relays equipped with coil that consume between 20 and 35mA can be used with up to 2 Universal Outputs when the 15V Power Supply Output is de-rated to supply 50mA maximum current.

PWM

Range Adjustable period from 2 to 65seconds

Thermal Actuator Management Adjustable warm up and cool down time

Floating

Minimum Pulse On/Off Time 500milliseconds

Drive Time Period Adjustable

0 to 10VDC

Voltage Range 0 to 10VDC linear

Source Current Maximum 20 mA at 10VDC (minimum load resistance 600 Ω)

Specifications - Digital Output (DO)

General

Output Type _____ 24VAC Triac; software configurable

Maximum Current per Output _____ 0.5A continuous

_____ 1A @ 15% duty cycle for a 10-minute period

Power Source _____ External or internal power supply (jumper selectable)

0 or 24VAC (On/Off)

Range _____ 0 or 24VAC

PWM

Range _____ Adjustable period from 2 to 65seconds

Floating

Minimum Pulse On/Off Time _____ 500milliseconds

Drive Time Period _____ Adjustable

Power Source _____ External or internal power supply (jumper selectable)

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Innovative Solutions for Greener Buildings, Allure, ECO-Vue, and Open-To-Wireless are trademarks of Distech Controls Inc.; LonWorks, LON, and LNS are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association; NiagaraAX Framework is a registered trademark of Tridium, Inc.; EnOcean is a registered trademark of EnOcean GmbH.

All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2015. All rights reserved.

